

EMPACK2

2W NON-MAINTAINED LED EMERGENCY KIT



Key Features:

- Constant current mode
- 3 hour emergency operation
- LED charge status display
- Test switch with self-test function
- Intelligent automatic recharging function
- Complete with 2 Metre AC cable
- Non-maintained LED emergency kit
- Ceiling mount LED module
- 30000hr lifetime

EMPACK2 SPECIFICATION

LED LAMP		BATTERY	
Input Voltage	220 ~ 240VAC	Battery Type	LiFePO4
Input Frequency	50 ~ 60Hz	Battery Voltage	3.2V
Input Current	30mA	Battery Capacity	3.3Ah
Input Power	5W	Charge Current	330mA
Operating Temperature	0°C to +40°C	Recharge Time	16Hrs
Max. Case Temperature	70°C	Discharge Duration	3Hrs
Input Connections	2 Metre AC Cable		
Dimensions	110 x 55mm		


LED Current	600mA
LED Power	2.5W
LED Colour	5700K
Lumen	330lm
CRI	80
Beam Angle	150°
Cutting Measurement	Ø92mm

REVA

Mechanical Diagram



Emergency LED

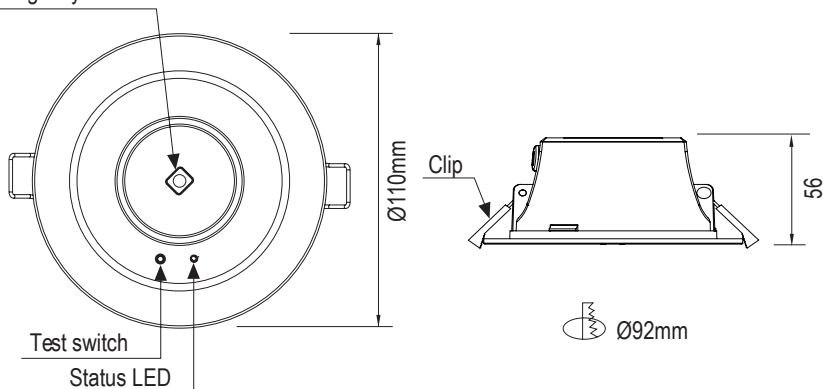

PowerLed
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

