



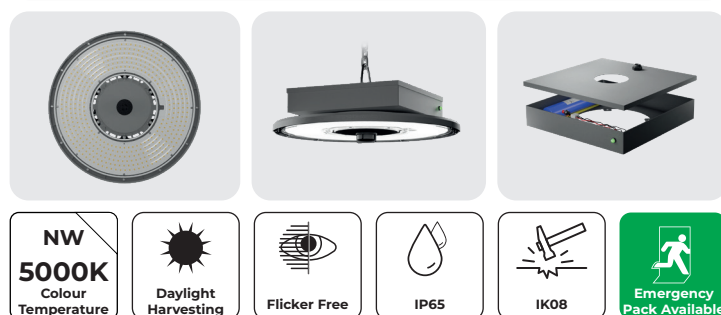

Product Features

- PIR or Bluetooth sensors available separately - works with **tuya**
- All sensors provide Motion Sensing by default and this function can be adjusted or turned off completely with a remote control - RC-100
- Daylight Harvesting, Corridor Function and Motion Sensing settings allow for multiple ways to increase cost savings long-term
- Dimmable via sensor and programmable with a Smart Phone or the RC-100 remote control (sold separately).

Mechanical Diagram

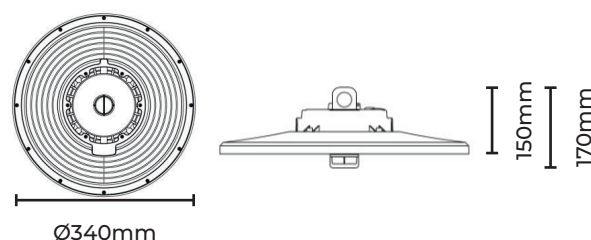

Electrical Data

Input Voltage	220-240V, 50/60Hz
Total Power	70W ~ 140W*
Power Factor	0.95

Photometric Data

Tone (CCT)	5000K
CRI (Ra)	>80
Lumens	11000 ~ 21000LM
Efficacy	150lm/W
Beam Angle	90°

Additional Data

Working Temperature	-30° C ~ +50° C
IP Rating	IP65
IK Protection	IK08
Housing	Aluminium
Mounting	Eye Bolt
Cable Length	1.5m
Weight	3.25kg
Dimensions	150 x Ø 340mm

Part Codes

GEN-EVO	LED High Bay	ANT-6-ZT	Zhaga Sensor with PIR + DT + MS*
GEN-EVO-EM	LED High Bay with Emergency Pack	ANT-6-ZT-BLE	BLE + DH + CF + MS*

*(DT) Daylight Threshold, (MS) Motion Sensing, (BLE) Bluetooth, (DH) Daylight Harvesting, (CF) Corridor Function