

Plug & Play Sensor

Input	220-240V AC 50/60Hz
Max Load	200W (LED)
Operating Temp	-20°C – +50°C
Connection Type	Quick Connector
Sensor Type	Microwave
Mounting Height	6m Max.
Control Type	ON/OFF





Plug & Play
Microwave Sensor

Class
II

IP20
Ingress
Protection



WARNING: Risk of electric shock!

Isolate the mains power before proceeding.


- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the product(s). The supply cable, fuses/circuit brakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur.
- Do not perform insulation strength or resistance tests on installed product(s) connected

Installation Procedure:


1. Slot the sensor into the geartray as shown, press the lever & click in making sure antenna protrudes through the geartray and it is firmly fixed in the slot.
2. Disconnect cable connectors between Terminal Block and Driver.
3. Join the Terminal Block & sensor input connectors.
4. Join the Driver & sensor input connectors.
5. Select the dip-switches on the back of the sensor to your desired settings.
6. Reconnect mains supply.

Detection Area			Hold Time				Daylight Sensor			
1	2		3	4	5		6	7	8	
ON	ON	100%	ON	ON	ON	5s	ON	ON	ON	2Lux
-	ON	75%	-	ON	ON	30s	ON	ON	-	10Lux
ON	-	50%	ON	-	ON	90s	-	ON	-	30Lux
-	-	25%	-	-	ON	5min	ON	-	-	50Lux
			ON	ON	-	20min	-	-	-	Disable
			-	-	-	30min				


1.
Press & click in

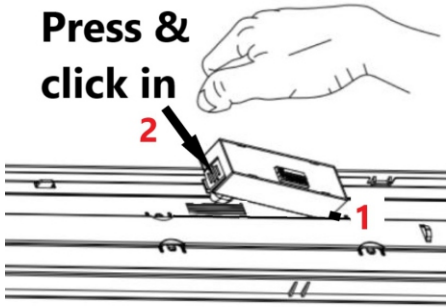


2.




3.

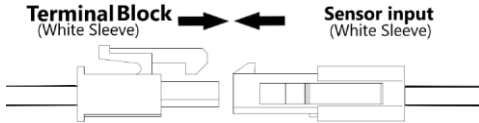


4.

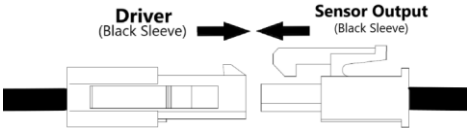

5.

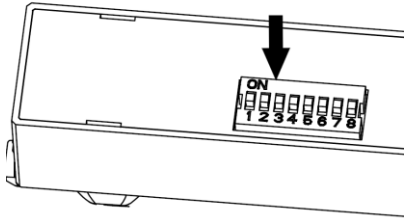

6.



7.

8.