


FLOOD LIGHT T Series

1200W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose






Product Specification

Energy Used:	1200W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-1344PCS
CCT:	2700-6500K
Luminous Flux (lm):	151200lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP67
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	32.22Kg

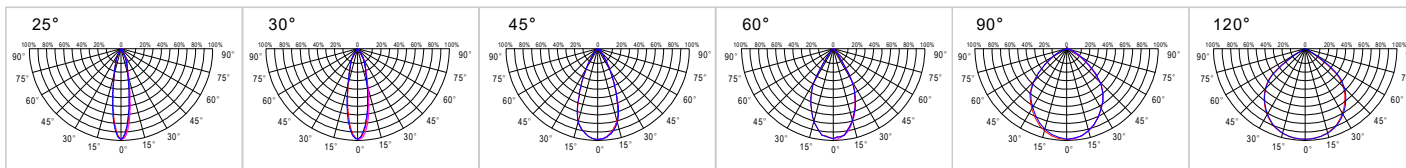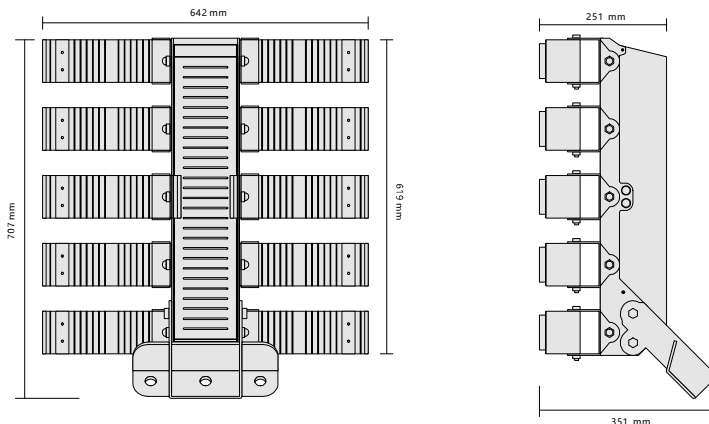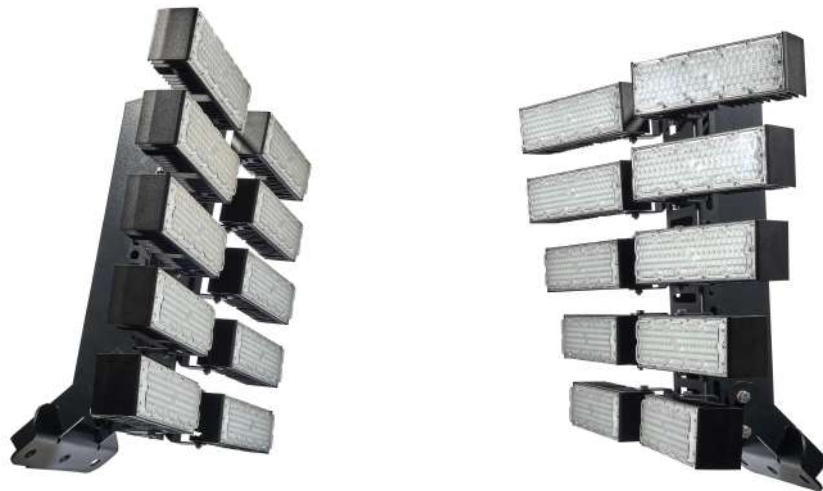

FLOOD LIGHT T Series

1000W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose





LUMILEDS

Product Specification

Energy Used:	1000W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-1120PCS
CCT:	2700-6500K
Luminous Flux (lm):	12600m(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP67
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	28.7Kg

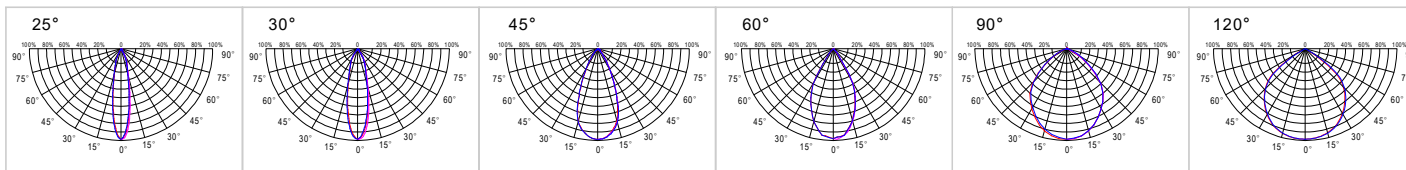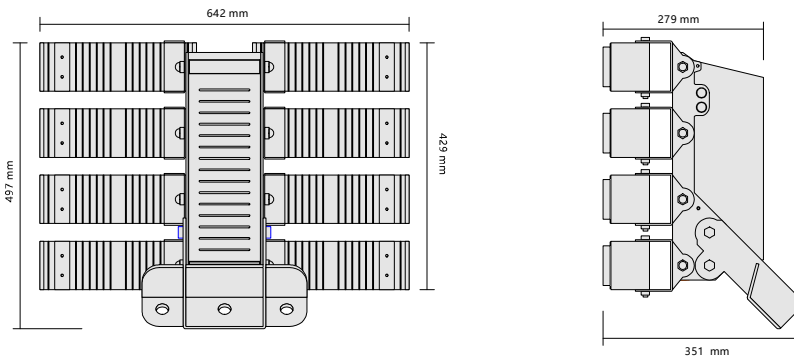

FLOOD LIGHT T Series

800W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



The light source can choose




Product Specification

Energy Used:	800W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-896PCS
CCT:	2700-6500K
Luminous Flux (lm):	10080lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP67
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	22.96Kg

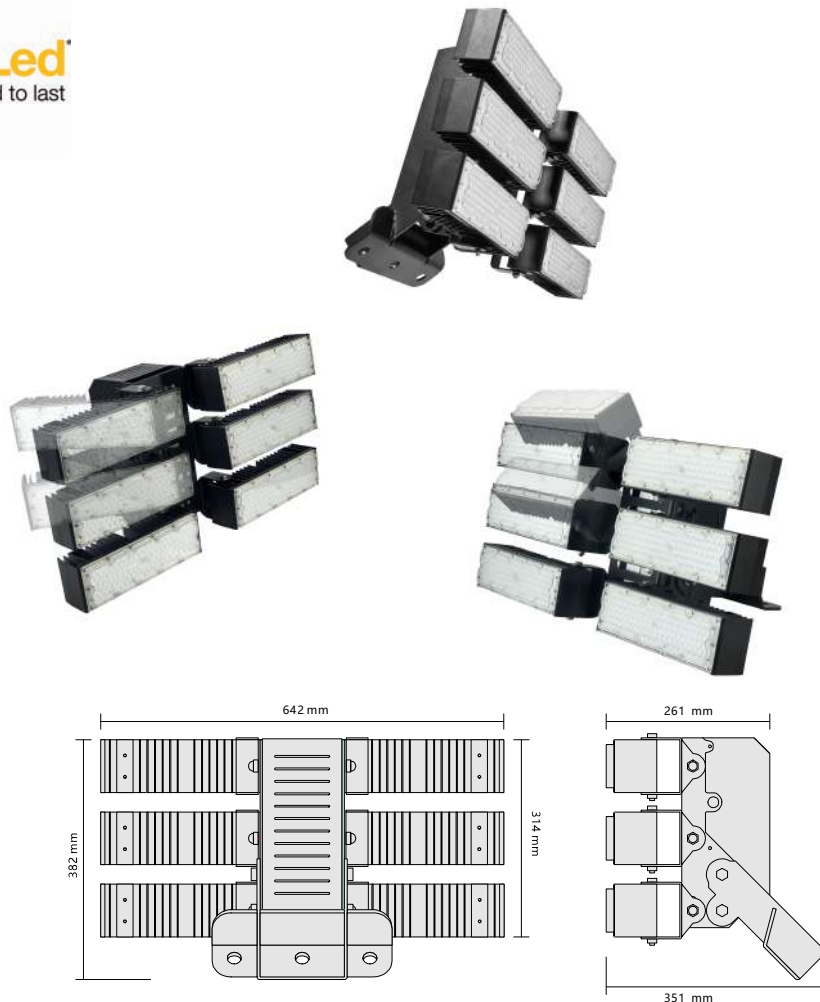

FLOOD LIGHT T Series

600W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose




The light source can choose








Product Specification

Energy Used:	600W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-672PCS
CCT:	2700-6500K
Luminous Flux (lm):	75600lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP67
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

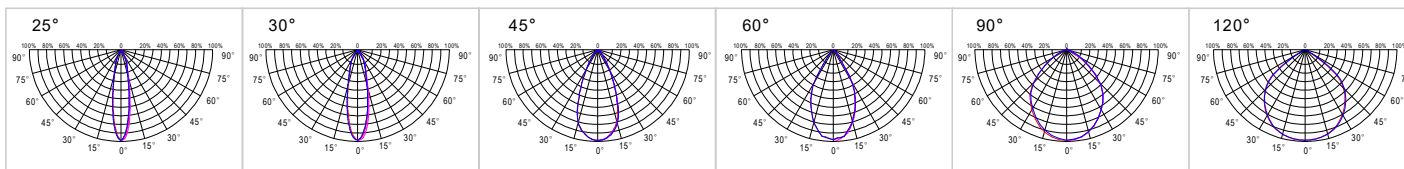

The related documents

Warranty:	5 Years
N.W:	18.16Kg

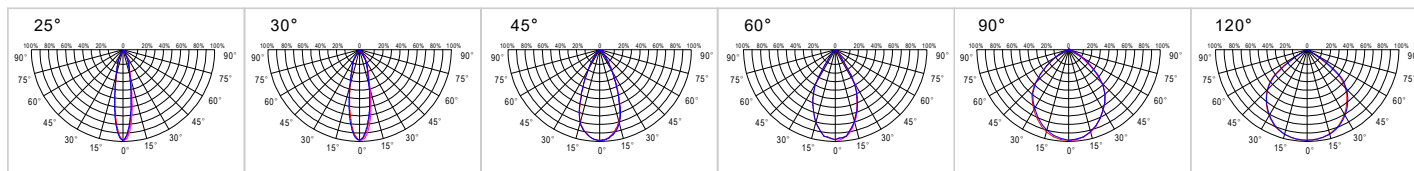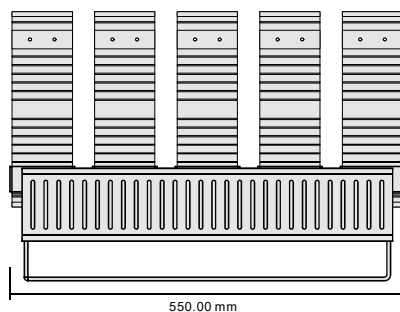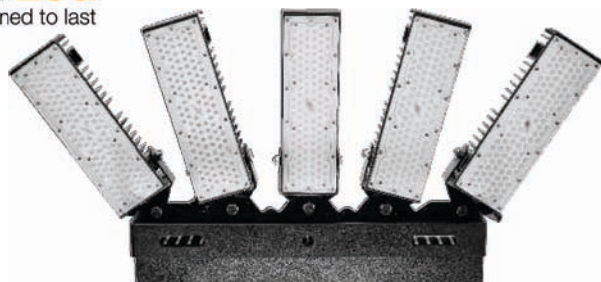

FLOOD LIGHT T Series

500W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose







Product Specification

Energy Used:	500W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-560PCS
CCT:	2700-6500K
Luminous Flux (lm):	63000lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP65
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	14.24Kg

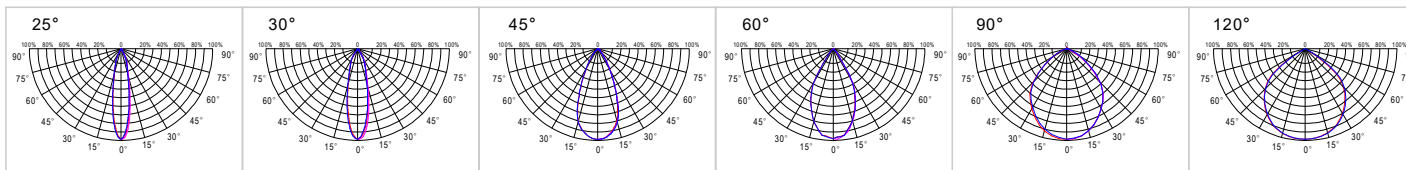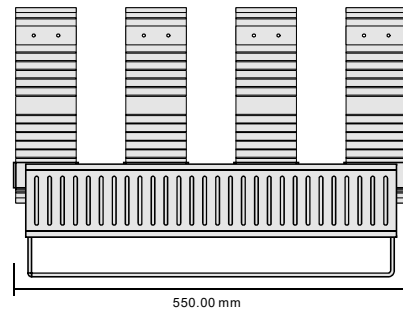

FLOOD LIGHT T Series

400W

Product Features

LED Luminous Efficiency:160-180lm/W

The driver can choose



HLG Series

The light source can choose

OSRAM





LUMILEDS

Product Specification

Energy Used:	400W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-448PCS
CCT:	2700-6500K
Luminous Flux (lm):	52000lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP65
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	13.82Kg

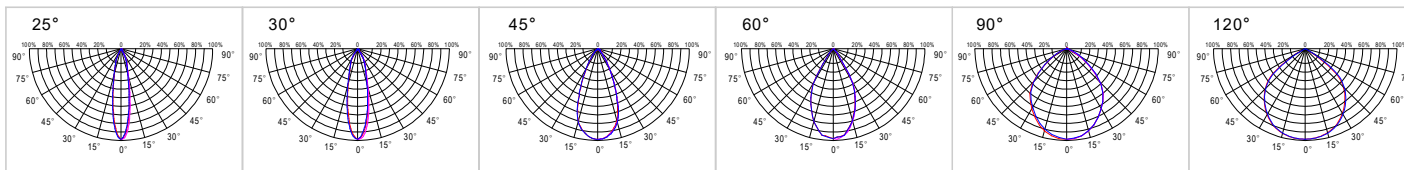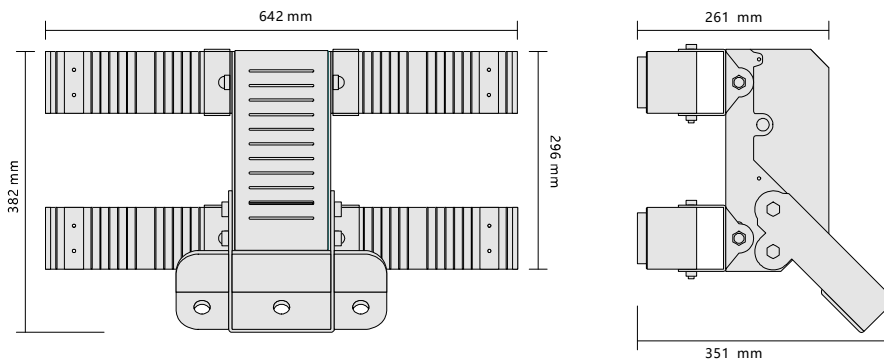

FLOOD LIGHT T Series

400W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose







Product Specification

Energy Used:	400W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030
CCT:	2700-6500K
Luminous Flux (lm):	50400lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP67
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	13.82Kg

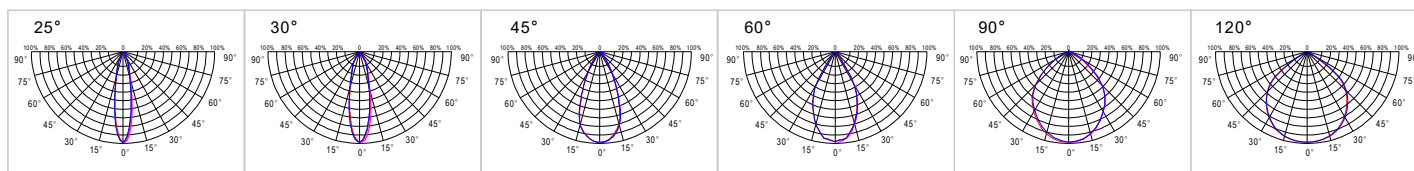

FLOOD LIGHT T Series

300W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose







LUMILEDS

Product Specification

Energy Used:	300W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-336PCS
CCT:	2700-6500K
Luminous Flux (lm):	37800lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP65
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	8.24Kg

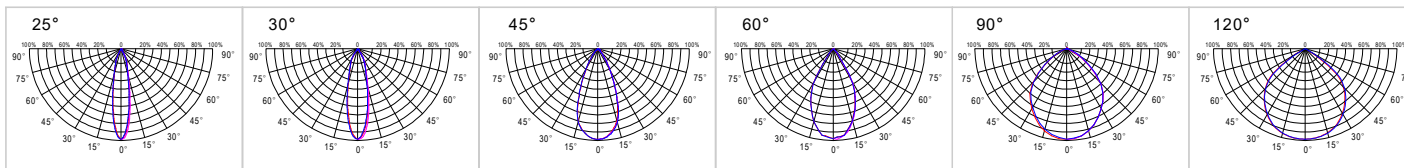

FLOOD LIGHT T Series

200W

Product Features

LED Luminous Efficiency: 160-180lm/W

The driver can choose



HLG Series

The light source can choose

OSRAM



LUMILEDS

Product Specification

Energy Used:	200W
Lifespan:	50,000 Hours
Material Quality:	Al+PC
Input Voltage:	90-305Vac 50/60Hz
Power Factor(PF):	>0.95
Driver:	MEANWELL HLG
Light Source:	SMD3030-224PCS
CCT:	2700-6500K
Luminous Flux (lm):	25200lm(5700K)
Luminous Efficiency:	126lm/W
Ra:	>80
Beam Angle:	25°/30°/45°/60°/90°/120°
Ingress Protection:	IP65
Operating Temperature:	-30°C~50°C
Operating Humidity:	10% ~80%

The related documents

Warranty:	5 Years
N.W:	6.14Kg