

RGBRF-RC1

RF WIRELESS LED REMOTE CONTROLLER



Key Features:


- RF Remote control colour wheel for use with the RGBRF-4x5A-REVA and RGBWIFI-4x8A
- Colour wheel to instantly mix millions of colour combinations, can then be stored in the cradle
- On/off and dimming functions
- 6 Zone control buttons
- Dynamic colour changing mode with pause function

RGBRF-RC1 SPECIFICATION

Part Code	RGBRF-RC1
Voltage	3.6Vdc min or 4.5Vdc (if using alkaline Batteries)
Max Load Current	3/4x8A
Rated Power	3/4/5x (60~288)W
Operation Frequency	434MHz/868MHz
Temperature Range	-20°C ~ +50°C
Remarks	Load 3pcs 7AAA (1.5V) batteries (Batteries not included)
Dimensions	140 x 48 x 17mm




Mechanical Diagrams

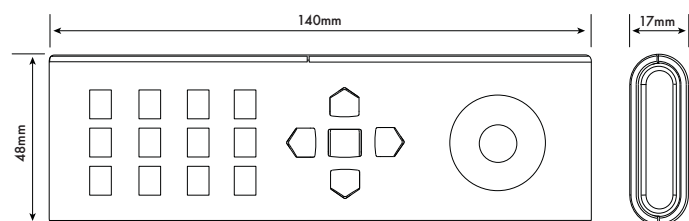

RGBRF-4x8A

RF WIRELESS LED REMOTE CONTROLLER

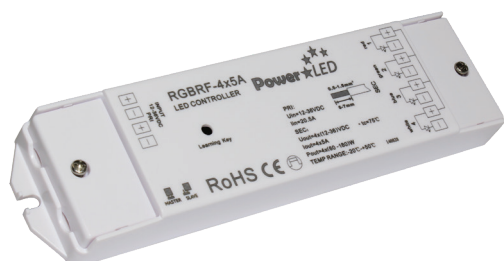

Key Features:

- RGB and RGB+W RF colour control interface
- 4 x 8A channels
- Store up to 6 Zones and 6 scenes on each zone
- 10 pre-set dynamic changing modes with pause function
- Able to mix millions of colour combinations
- For use with the RGBRF-RC1 remote control and/ or the RGBRF-WM
- Wall mount colour wheel

RGBRF-4X5A SPECIFICATION

Part Code	RGBRF-4x8A	RGBRF-4x4A
Voltage	12-36Vdc	48Vdc
Max Load Current	3/4x8A	3/4x4A
Rated Power	3/4x(96-288)W	3/4x 192W
Load Type	0.04~0.1W	0.04~0.1W
Temperature Range	-20°C ~ +50°C	-20°C ~ +50°C
TA	-20°C ~ +50°C	-20°C ~ +50°C
TC	+75°C	+75°C
Remarks	Constant Voltage	Constant Voltage
Dimensions	178 x 57 x 21mm	178 x 57 x 21mm



Mechanical Diagrams

