

RGBRF-WM Series

RF wireless wall mounted LED controller compatible with RGBRF-4x5A or RGBWIFI-4x5A Receiver




Features

- Suitable for indoor LED lighting
- User-friendly interface, easy and simple operation
- Control up to 4 zones & set 4 scenes at each zone
- Preset 10 changing modes, with pause function
- Capable of RGB colour adjustment
- Press button RGBW controller
- Can achieve Red/Green/Blue/White colour directly
- Synchronization function of pattern changes ensure consistent change
- Enable to dim brightness of each R, G, B, W channel, in order to mix millions of colors.
- Controlled by Smartphone App
- Three-channel/ four-channel



Specification

MODEL No.	RGBRF-WM	RGBRF-4x5A	RGBWIFI-4x5A
INPUT	Voltage	100~240VAC	12-36Vdc
OUTPUT	Max Load Current	3/4/5x5A	3/4/5x5A
	Rated Power	3/4/5x(60-180)W	3/4x(60-180)W
	Load Type	~	0.04~0.1W
	Operation Frequency	434MHz/888MHz	-
PROTECTION	Temperature Range	~	-20°C ~ +50°C
ENVIRONMENTAL	TA	~	-20°C ~ +50°C
	TC	~	+75°C
OTHERS	Remarks	Touch Sensor	

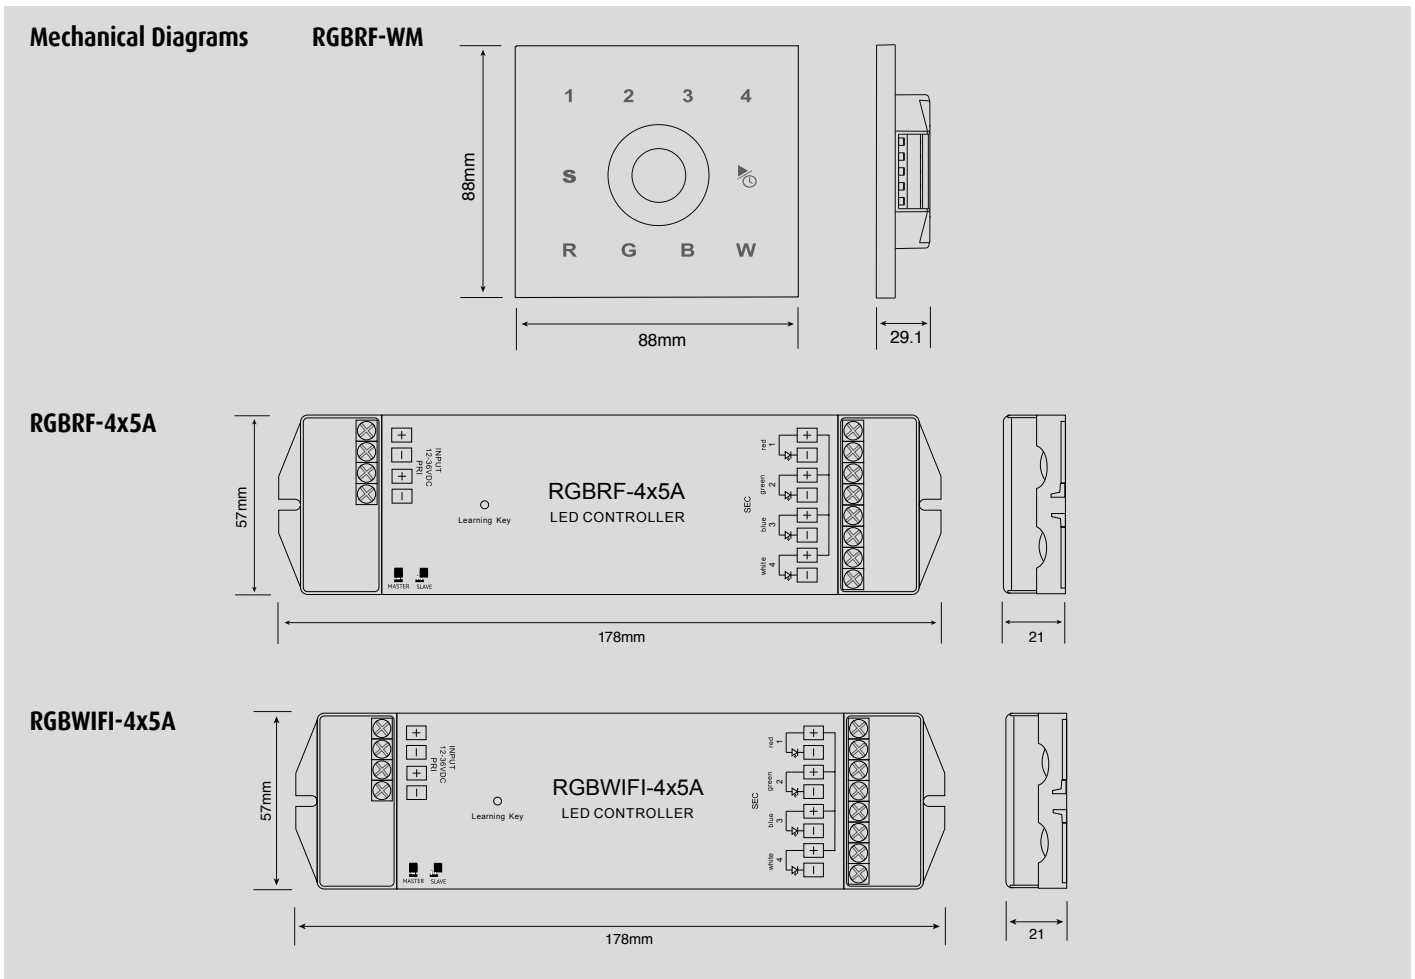


RGBRF-WM Series

RF wireless wall mounted LED controller compatible with RGBRF-4x5A or RGBWIFI-4x5A Receiver



Wiring Diagram

1) Receiver Connection Diagram for Single Unit

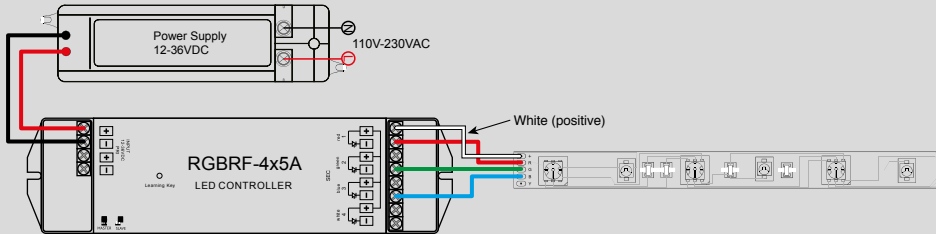

2) Receiver Connection Diagram for Multiple Units

