


15 metres of uniform light output, powered from one end




Product Features

- Power required from one end only
- Uniform light output across the entire length of 15 metres
- Colour Changing RGB
- Industrial grade adhesive backing tape
- Operating temperature -20°C ~ +40°C
- High efficacy
- 3 years warranty

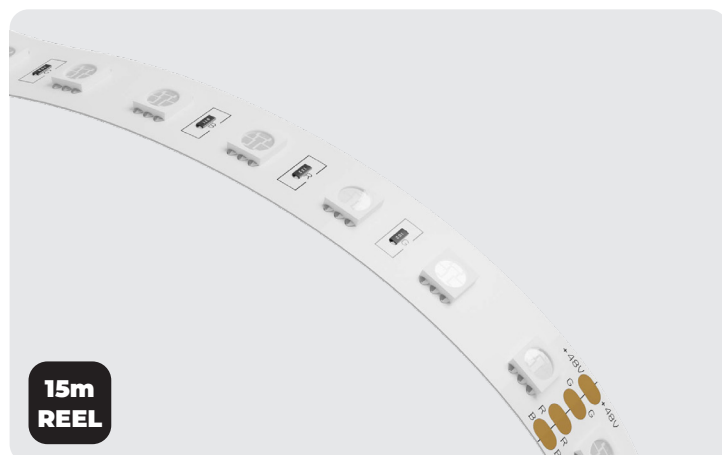

Specifications

Stock Code	5195-915 	4518-978 
Part Code	RGB-48-100-20	RGB-48-100-65
Input Voltage	48VDC	48VDC
Wattage	14.4W/m	14.4W/m
Lumen Output	280lm/m	250lm/m
Colour	RGB	RGB
LED/metre	100	100
Beam Angle	120°	120°
Cut Points	100mm	100mm
IP Rating	IP20	IP65
Dimensions	15000 x 10 x 1.8mm	15000 x 10 x 3mm

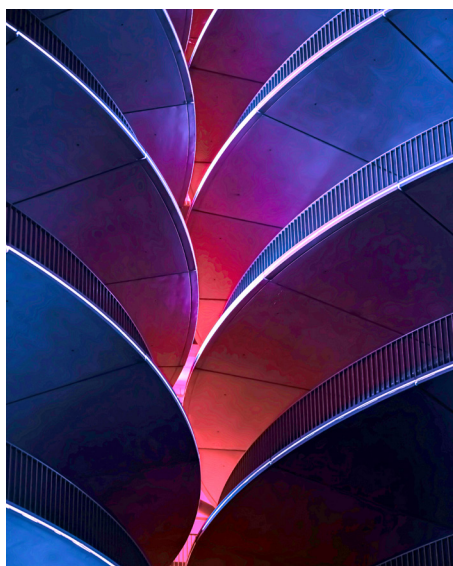

RGB

15 metres of uniform light output, powered from one end



Compatibility*



Control Methods (sold separately)

- Remote Control
- Bluetooth (Apps, Voice Control)
- Sound Reactive (colour changing, dimming)
- Hard-wired wall-mounted controller
- RF wall-mounted or remote controlled

Suggested Drivers

Up to 7m

Power supplied from ONE end

HLG-120H-48A

Up to 15m

Power supplied from ONE end

HLG-240H-48A


Up to 30m

Power supplied from MIDDLE


HLG-480H-48A

Mechanical Diagram

IP20

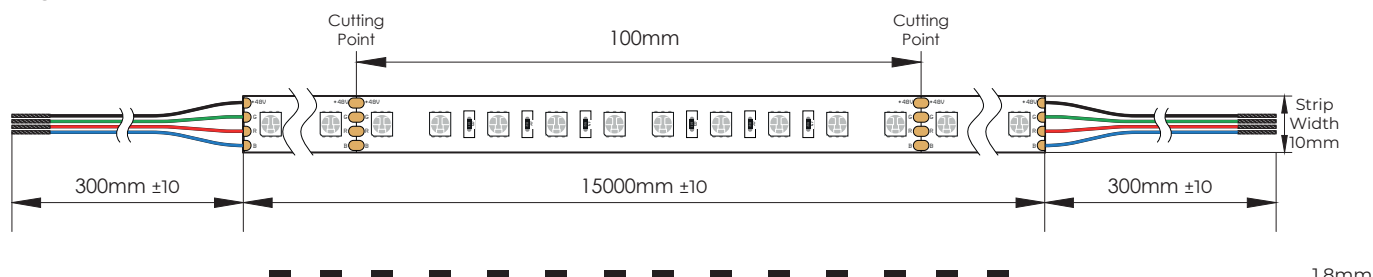

IP65

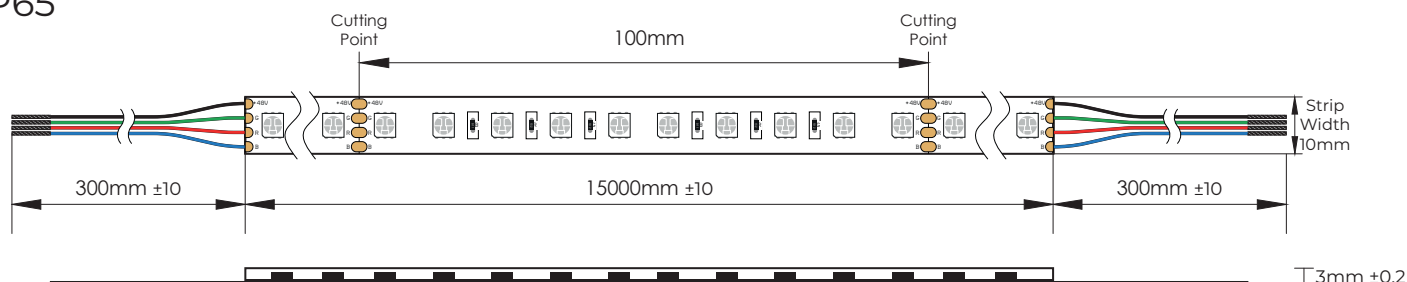

* Product compatibility with other brands is shown for informational purposes only. All third-party company names and logos are trademarks of their respective owners and do not constitute an endorsement or partnership with our company.


RGB

15 metres of uniform light output, powered from one end




Connectors (sold separately)

WIRE TO WIRE

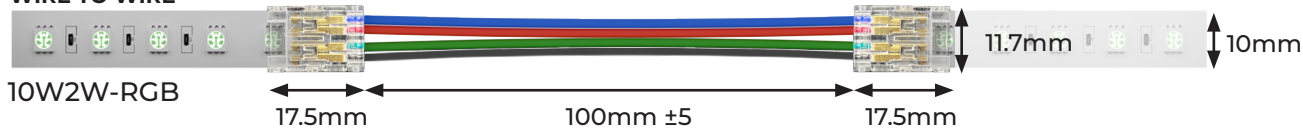

TAPE TO DRIVER

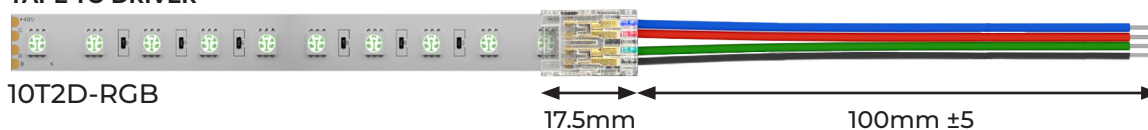

TAPE TO TAPE

