


ZEN-REV-A

10W - 30W LED DOWNLIGHTS



10~30W



Beam Angle
100°



UGR <32



Energy
Consumption



L80
50,000 hours



Flicker Free



5 Years
Warranty



UPGRADEABLE



DALI





CASAMBI



EMERGENCY

PRODUCT FEATURES

- CCT and Power configurable via DIP switches
- Aluminium housing with powder coated finish
- Aging-resistant anti-glare prismatic PC diffuser
- Leading Edge or Trailing Edge standard dimming
- Standard Deviation Colour Matching - 5
- Plug and play
- Optional emergency pack available

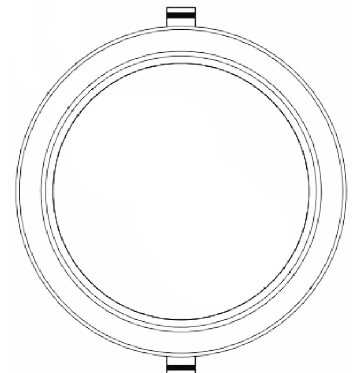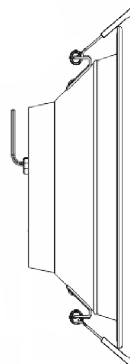

ZEN-REV-A SERIES

10W - 30W LED DOWNLIGHTS



SPECIFICATIONS



Stock Code	0976-344	0284-418
Part Code	ZEN4-REV-A	ZEN5-REV-A
Input	220-240VAC	220-240VAC
Selectable Power	10W / 14W	13W / 18W
Lumen Output	900LM / 1100LM / 1000LM (10W)	1300LM / 1500LM / 1450LM (13W)
Lumen Output	1250LM / 1500LM / 1450LM (14W)	1600LM / 1900LM / 1850LM (18W)
Power Factor	>0.9	>0.9
CCT Selectable	3000K / 4000K / 5700K	3000K / 4000K / 5700K
CRI	>80Ra	>80Ra
Efficacy (lm/W)	≤110LM/W	≤115LM/W
Driver	350mA 26-52VDC	350mA 26-52VDC
IC Rating	IC-4 @Ta25°C	IC-4 @Ta25°C
Working Temperature	-20°C ~ +50°C	-20°C ~ +50°C
Cutout	Ø120mm	Ø135mm
Protection	IP63 Front Face	IP63 Front Face
Weight	330g	370g
Dimensions	Ø145 x 61mm	Ø165 x 63mm
Cable Length	900mm	900mm

SPECIFICATIONS



Stock Code	0393-378	0288-743
Part Code	ZEN7-REV-A	ZEN8-REV-A
Input	220-240VAC	220-240VAC
Selectable Power	15W / 20W	23W / 30W
Lumen Output	1300LM / 1450LM / 1350LM (15W)	2100LM / 2400LM / 2250LM (23W)
Lumen Output	1800LM / 2050LM / 1950LM (20W)	2800LM / 3150LM / 2900LM (30W)
Power Factor	>0.9	>0.95
CCT Selectable	3000K / 4000K / 5700K	3000K / 4000K / 5700K
CRI	>80Ra	>80Ra
Efficacy (lm/W)	≤114LM/W	≤117LM/W
Driver	380mA 24-48VDC	700mA 21-43VDC
IC Rating	IC-4 @Ta25°C	IC-4 @Ta25°C
Working Temperature	-20°C ~ +50°C	-20°C ~ +50°C
Cutout	Ø160mm	Ø195mm
Protection	IP63 Front Face	IP63 Front Face
Weight	420g	560g
Dimensions	Ø200 x 68mm	Ø230 x 75mm
Cable Length	900mm	900mm