

TYRO

LED SLIM BATTEN



Key Features:

- 120° light distribution
- Up to 125lm/W
- Ultra robust compact design
- IP20 ingress protected
- Excellent optical design
- Long service life
- Uses less power than fluorescent alternatives
- Easy fix brackets for faster installation
- Internal Emergency & external Microwave Sensor options available

TYRO SPECIFICATION

Part Code	TYRO2-1250-4K	TYRO4-2250-4K	TYRO5-3750-4K	TYRO5-6700-4K-T
Input Voltage	220~240VAC	220~240VAC	220~240VAC	220~240VAC
Power	10W	18W	30W	55W
Power Factor	>0.95	>0.95	>0.95	>0.95
Lumens	1250lm	2250lm	3750lm	6700lm
Colour (K)	4000K	4000K	4000K	4000K
Lumen Field Angle	120°	120°	120°	120°
Working Temperature	-15°C ~ +50°C	-15°C ~ +50°C	-15°C ~ +50°C	-15°C ~ +50°C
CRI	>80	>80	>80	>80
Weight	0.5Kg	0.88Kg	1.08Kg	1.1Kg
Dimensions	600 x 50 x 55mm	1200 x 50 x 55mm	1500 x 50 x 55mm	1500 x 50 x 55mm

Part Code	TYRO6-4000-4K	TYRO6-7400-4K-T	TYRO6-8900-4K-TX
Input Voltage	220~240VAC	220~240VAC	220~240VAC
Power	32W	62W	73W
Power Factor	>0.95	>0.95	>0.95
Lumens	4000lm	7400lm	8900lm
Colour (K)	4000K	4000K	4000K
Lumen Field Angle	120°	120°	120°
Working Temperature	-15°C ~ +50°C	15°C ~ +50°C	-15°C ~ +50°C
CRI	>80	>80	>80
Weight	1.18Kg	1.2Kg	1.2Kg
Dimensions	1800 x 50 x 55mm	1800 x 50 x 55mm	1800 x 50 x 55mm



PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com




TYRO


LED SLIM BATTEN



Mechanical Diagrams

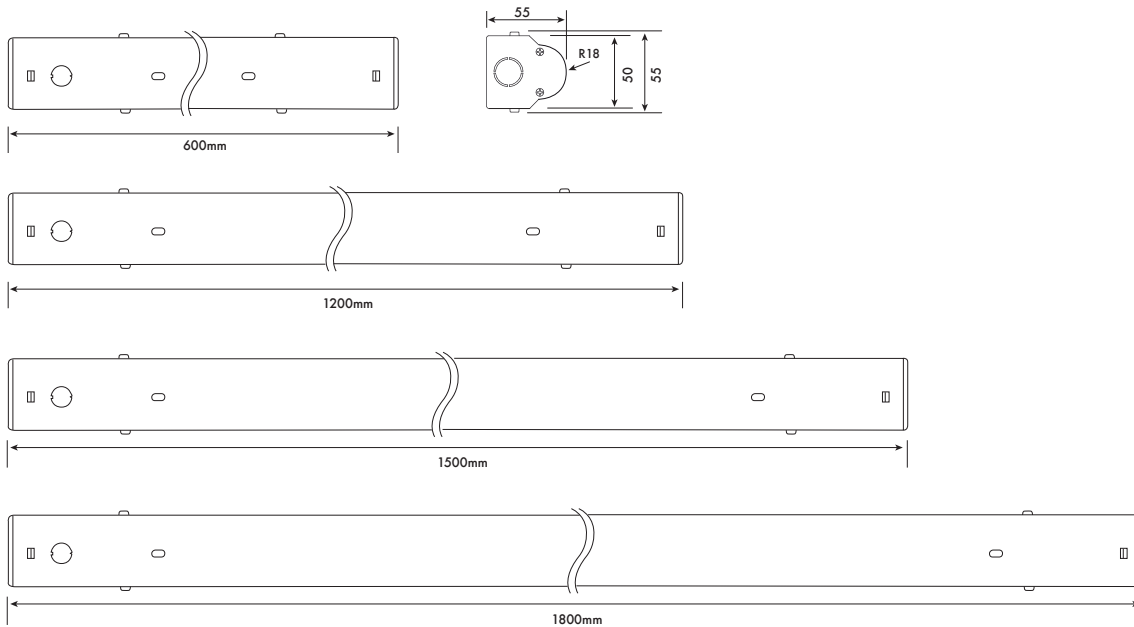

Photometrics

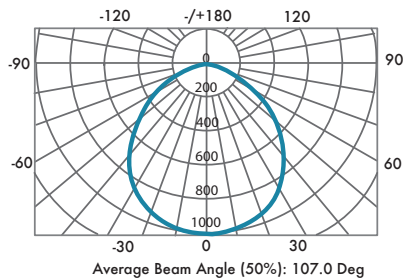

Height	E ave, Emax	Angle: 107.08deg	Diameter
1m	174.9, 550.0lx		277.78cm
2m	43.74, 137.5lx		555.56cm
3m	19.44, 61.11lx		833.35cm
4m	10.93, 34.38lx		1111.13cm
5m	6.998, 22.00lx		1388.91cm

Available Variants

TYRO4-2250-4K-EP3	Emergency
TYRO4-2250-4K-MS	Microwave Sensor
TYRO4-2250-4K-MS-EP3	Emergency & Microwave Sensor
TYRO5-3750-4K-EP3	Emergency
TYRO5-3750-4K-MS	Microwave Sensor
TYRO5-3750-4K-MS-EP3	Emergency & Microwave Sensor
TYRO5-6700-4K-T-EP3	Emergency
TYRO5-6700-4K-T-MS	Microwave Sensor
TYRO5-6700-4K-T-MS-EP3	Emergency & Microwave Sensor
TYRO6-4000-4K-EP3	Emergency
TYRO6-4000-4K-MS	Microwave Sensor
TYRO6-4000-4K-MS-EP3	Emergency & Microwave Sensor
TYRO6-7400-4K-T-EP3	Emergency
TYRO6-7400-4K-T-MS	Microwave Sensor
TYRO6-7400-4K-T-MS-EP3	Emergency & Microwave sensor
TYRO6-8900-4K-TX-EP3	Emergency
TYRO6-8900-4K-TX-MS	Microwave Sensor
TYRO6-8900-4K-TX-MS-EP3	Emergency & Microwave Sensor

TYRO2-1250-4K ~ Emergency and Microwave Sensor options are not available.

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

