


LED Flexi Tape Tuneable White

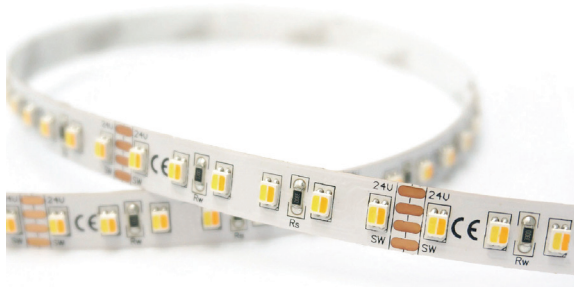

Key Features:



- Tuneable White from 3000K ~ 6000K
- High CRI ≥ 80
- Supplied in 5M reels cuttable every 50mm
- 60 and 120 LEDs per metre
- Fitted with 3M Adhesive tape
- 3 years warranty

TUNEABLE WHITE SPECIFICATION

Model No.	TN-55-27-1-60-F10-20-FP	TN-55-27-2-120-F10-20-FP
Voltage	12VDC	24Vdc
Power Consumption	9.6W/M	19.2W/M
LED Qty	60 per mtr	120 per mtr
LED pitch	16.7mm	16.67mm
Beam Angle	120°	120°
Cutttable	Every 50mm	Every 100mm
Colour Target	3000K ~ 6000K	3000K ~ 6000K
Luminous Flux	750lm/M	1500lm/M
IP Rating	IP20	IP20
Back Adhesive	3M adhesive tape	3M adhesive tape
Working temperature	-20°C ~ +40°C	-20°C ~ +40°C
Humidity	40% ~ 70% RH	40% ~ 70% RH
Dimensions	5000 x 10 x 2.3mm	5000 x 10 x 2.3mm



Mechanical

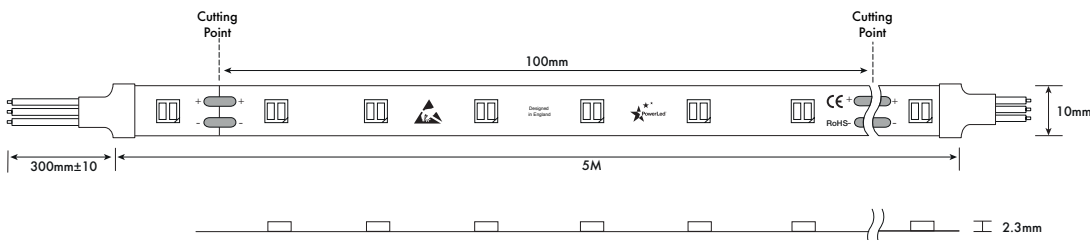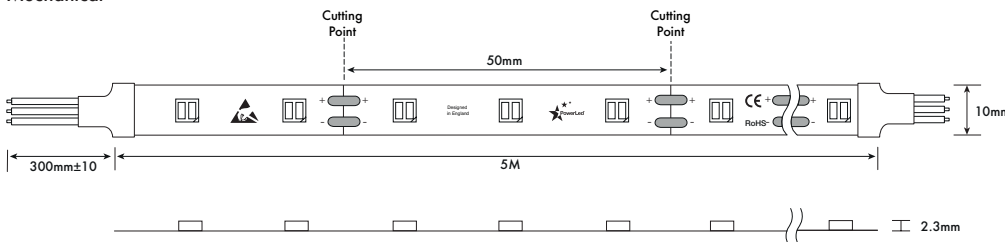

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN


Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com



LED Flexi Tape Tuneable White



Photometrics

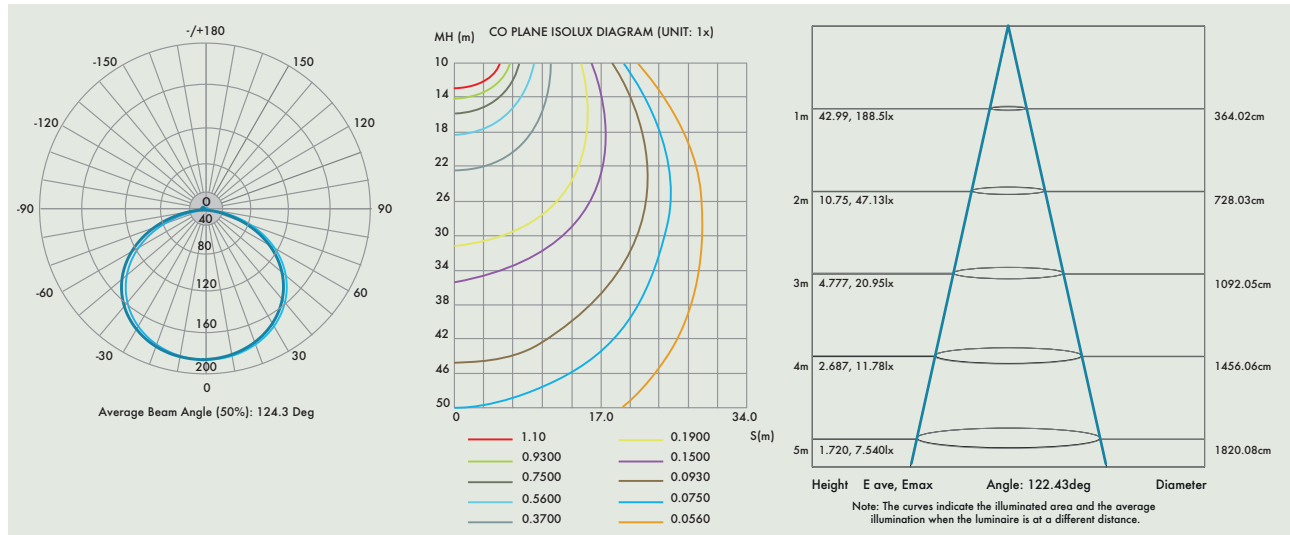


Also Available

CCT-RF-RCX



CCT-RF-3x5A

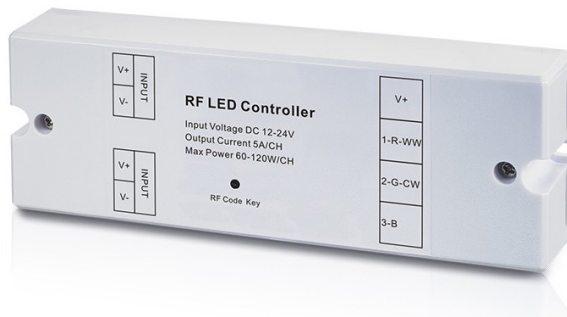

Key Features:

- Suitable for indoor LED lighting
- User-friendly interface, easy and simple operation
- Full Tone Adjustment
- Dimming Control
- Simple Modes
- Smooth Tone Control Curve
- Operating Frequency 434MHz/868MHz/915MHz