


## IDIS LED WALL PACK

Designed with robust aluminium housing and IK10 impact tested.



Opaque diffuser

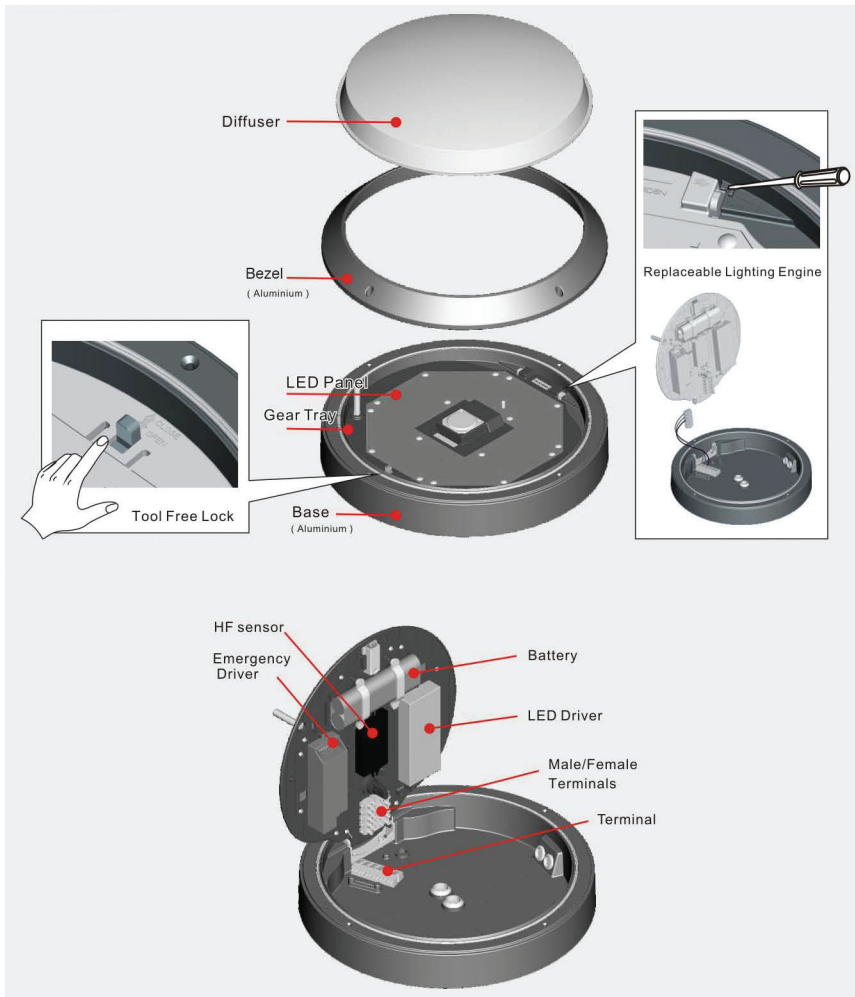

### Product Features

- 120° Light distribution
- Up to 130lm/W
- Ultra robust aluminium design
- IP65 Ingress protected
- Excellent optical design
- Long service life
- Uses less power than fluorescent alternatives
- 3 hour emergency option available
- Surface and pendant mounting for ease of installation

## IDI-900S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
15W	220-240V	120°	>80	800lm	Aluminium & Grey	4000K	IDI-900S



Dimensions Ø 265 x 90mm



## IDI-1000S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
15W	220-240V	120°	>80	900lm	Aluminium & Grey	4000K	IDI-1000S



Dimensions Ø 360 x 9105mm



## IDI-1000EO3S-ST

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
16W	220-240V	120°	>80	900lm	Aluminium & Grey	4000K	IDI-1000EO3S-ST



Dimensions Ø 360 x 105mm



## IDI-1500S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
20W	220-240V	120°	>80	1300lm	Aluminium & Grey	4000K	IDI-1500S



Dimensions Ø 360 x 105mm



## IDI-1500EO3S-ST

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
21W	220-240V	120°	>80	1300lm	Aluminium & Grey	4000K	IDI-1500EO3S-ST



Dimensions Ø 360 x 105mm



## IDI-L-C900S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
15W	220-240V	120°	>80	650lm	Aluminium & Grey	4000K	IDI-L-C900S



Dimensions Ø 265 x 96mm



## IDI-L-C1000S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
15W	220-240V	120°	>80	700lm	Aluminium & Grey	4000K	IDI-L-C900S



Dimensions Ø 360 x 112mm



## IDI-L-C1000EO3S-ST

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
15W	220-240V	120°	>80	700lm	Aluminium & Grey	4000K	IDI-L-C1000EO3S-ST



Dimensions Ø 360 x 112mm



## IDI-L-C1500S

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
20W	220-240V	120°	>80	1000lm	Aluminium & Grey	4000K	IDI-L-C1500S



Dimensions Ø 360 x 112mm



## IDI-L-C1500EO3S-ST

Power	Input Voltage	Beam Angle	CRI	Lumen Output	Fitting Colour	Colour	Part Code
21W	220-240V	120°	>80	1000lm	Aluminium & Grey	4000K	IDI-L-C1500S



Dimensions Ø 360 x 112mm

