

# RGBRF-RC2 & RGBRF-3x5A Series

RF wireless LED remote controller



114.2 x 40.8 x 7.5mm

## Features


- Suitable for indoor LED lighting
- User-friendly interface, easy and simple operation
- Highly sensitive & high stable touch colour wheel, fast & precise colour control.
- Control for 2 independent zones
- 1 colour changing mode
- Adjustable speed control with 8 levels, quickest speed is 4 S, slowest speed is 256 S.
- Can be operated with power repeaters




## Specification

	MODEL No.	RGBRF-RC2	RGBRF-3x5A
INPUT	<b>Voltage</b>	3.6Vdc min or 4.5Vdc (if using Alcholine Batteries)	12-36Vdc
	<b>Max Load Current</b>	3/4/5x5A	3x5A
OUTPUT	<b>Rated Power</b>	3/4/5x(60-180)W	3x(60-180)W
	<b>Load Type</b>	~	0.04 ~ 0.1W LED
	<b>Operation Frequency</b>	434MHz/868MHz	434MHz/868MHz
PROTECTION	<b>Temperature Range</b>	~	-20°C ~ +50°C
ENVIRONMENTAL	<b>TA</b>	~	-20°C ~ +50°C
	<b>TC</b>	~	+75°C
OTHERS	<b>Remarks</b>	Load 3pcs 7AAA (1.5V) batteries (Batteries not included)	Constant Voltage

## Mechanical Diagrams

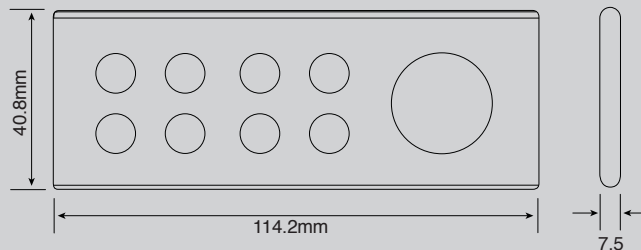

## RGBRF-3x5A

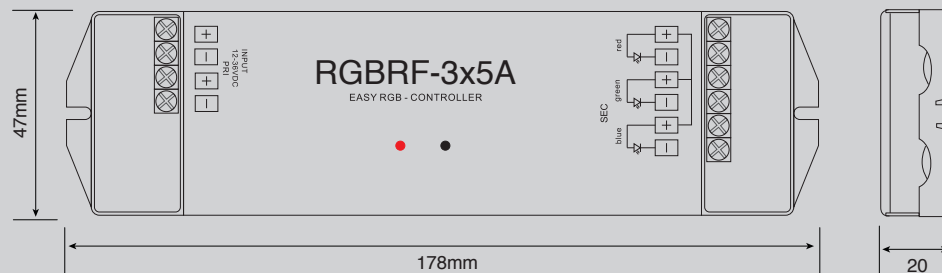

# RGBRF-RC2 & RGBRF-3x5A Series

RF wireless LED remote controller



## Wiring Diagram

