


S-Type LED Flexible Strip

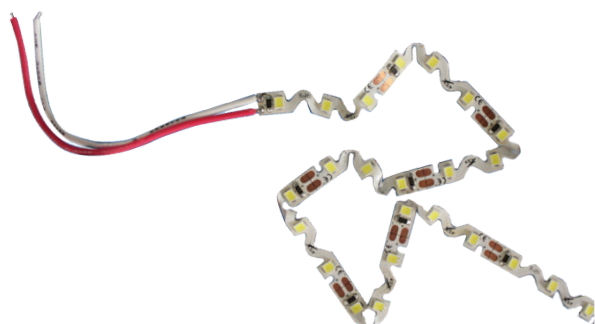

Key Features:


- Designed for signs, sculptured lettering and back lit lighting
- Easy to install around tight corners
- Continuous length up to 3m
- ECO friendly and energy saving
- 50,000 hours working life
- 3M Adhesive backing

HIGH CRI SPECIFICATION

Model Number	C0-11-35-1-60-F6S-20-10M-FP	D0-11-35-1-60-F6S-20-10M-FP	F5-11-35-1-60-F6S-20-10M-FP
Lumen Output	540lm	600lm	600lm
LED Chip	2835	2835	2835
LED Qty	60 per mtr	60 per mtr	60 per mtr
CRI	>80Ra	>80Ra	>80Ra
Cut Points	100mm	100mm	100mm
Input Voltage	12Vdc	12Vdc	12Vdc
Output Power (p/m)	7.2W/M	7.2W/M	7.2W/M
CCT Colour Tone	3000k	4000k	6500k
Working Temperature	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C
Ambient Temperature	-20°C ~ +65°C	-20°C ~ +65°C	-20°C ~ +65°C
Dimensions	10000 x 6 x 1.2mm	10000 x 6 x 1.2mm	10000 x 6 x 1.2mm



Mechanical

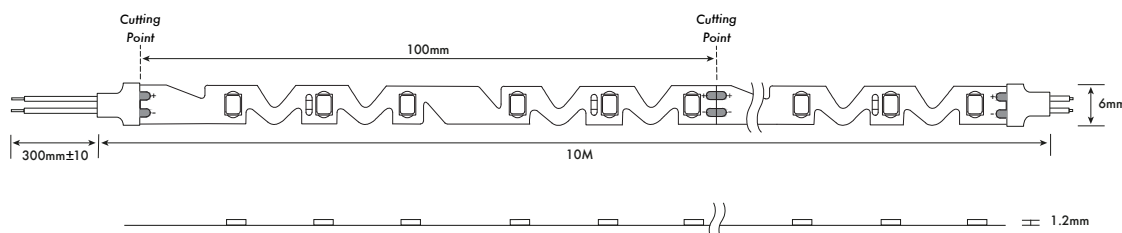

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

