

# CHROMA Constant Current LED Tape



## Key Features:

- Constant current design to ensure even colour distribution over longer lengths
- 24Vdc input voltage
- Maximum powered from one end 20M
- 60 LEDs per mtr
- Multiple applications for commercial and residential environments
- Compatible with DALI/DMX/0-10V/Mains and all other dimming drivers

## CHROMA IP20 CONSTANT CURRENT SPECIFICATION


Part Code	B5-11-28-2-60-F10-CC-20-20M	C0-11-28-2-60-F10-CC-20-20M	D0-11-28-2-60-F10-CC-20-20M	F1-11-28-2-60-F10-CC-20-20M
Voltage	24VDC	24VDC	24VDC	24VDC
Power Consumption	4.32W/M	4.32W/M	4.32W/M	4.32W/M
LED Qty	60 per mtr	60 per mtr	60 per mtr	60 per mtr
Cutttable	Every 100mm	Every 100mm	Every 100mm	Every 100mm
Colour	2500K	3000K	4000K	6100K
PCB Width	10mm	10mm	10mm	10mm
Luminous Flux	450lm/M	450lm/M	510lm/M	510lm/M
CRI	80Ra	80Ra	80Ra	80Ra
IP Rating	IP20	IP20	IP20	IP20
Working Temperature	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C
Working Humidity	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH
Dimensions	20,000 x 10mm	20,000 x 10mm	20,000 x 10mm	20,000 x 10mm

## CHROMA IP65 CONSTANT CURRENT SPECIFICATION

Part Code	B5-11-28-2-60-F10-CC-65-20M	C0-11-28-2-60-F10-CC-65-20M	D0-11-28-2-60-F10-CC-65-20M	F1-11-28-2-60-F10-CC-65-20M
Voltage	24VDC	24VDC	24VDC	24VDC
Power Consumption	4.32W/M	4.32W/M	4.32W/M	4.32W/M
LED Qty	60 per mtr	60 per mtr	60 per mtr	60 per mtr
Cutttable	Every 100mm	Every 100mm	Every 100mm	Every 100mm
Colour	2500K	3000K	4000K	6100K
PCB Width	10mm	10mm	10mm	10mm
Luminous Flux	450lm/M	450lm/M	510lm/M	510lm/M
CRI	80Ra	80Ra	80Ra	80Ra
IP Rating	IP65	IP65	IP65	IP65
Working Temperature	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C
Working Humidity	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH
Dimensions	20,000 x 10mm	20,000 x 10mm	20,000 x 10mm	20,000 x 10mm



## Mechanical

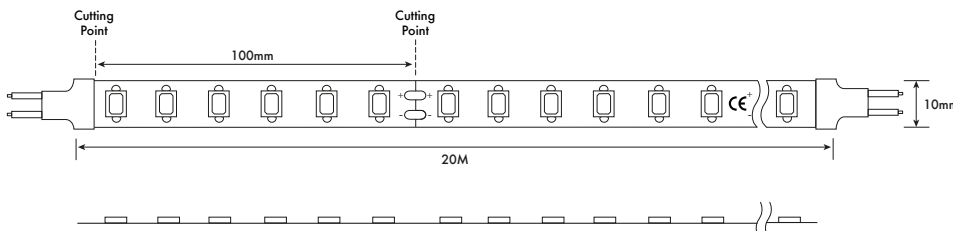

PowerLed (UK) Ltd  
Orion House  
Calleva Park  
Aldermaston  
Berkshire  
RG7 8SN

Contact:  
Tel: 0118 9703856  
enquiries@powerled.uk.com  
www.powerled.uk.com

