

REVO-IP

22~60W LED Batten Light




Key Features:

- 120° Light distribution
- Up to 118Lm/M
- Ultra robust aluminium design
- IP65 Ingress protected
- Excellent optical design
- Long service life
- Uses less power than fluorescent alternatives
- Easy fix brackets for faster installation
- 3 hour emergency option available

REVO-IP SPECIFICATION

Part Number	RV2-IP-2600-4K	RV4-IP-4625-4K	RV5-IP-6850-4K
Fitting Colour	Aluminium & Grey	Aluminium & Grey	Aluminium & Grey
Power	22W	40W	60W
Power Factor	>0.95	>0.95	>0.95
Input Voltage	90 ~ 277VAC	90 ~ 277VAC	90 ~ 277VAC
Colour (K)	4000K	4000K	4000K
Lumens	2600lm	4625lm	6850lm
Lumen Field Angle	120°	120°	120°
Impact Protection	IK10	IK10	IK10
Working Temperature	-15 ~ +50°C	-15 ~ +50°C	-15 ~ +50°C
CRI	>80%	>80%	>80%
Dimensions	600 x 85 x 74mm	1200 x 85 x 74mm	1500 x 85 x 74mm

Mechanical Diagrams

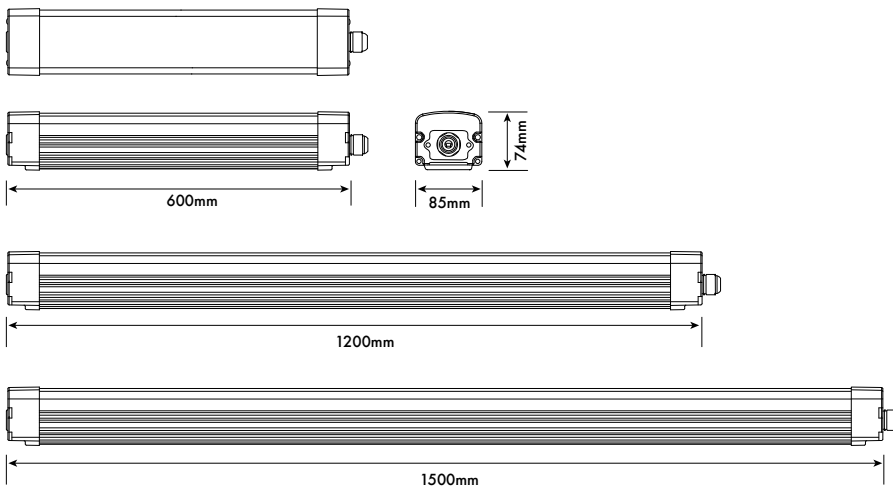

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com



REVO-IP


22~60W LED Batten Light



Emergency Options

- RV2-IP-2600-4K-EP3 Emergency
- RV4-IP-4625-4K-EP3 Emergency
- RV5-IP-6850-4K-EP3 Emergency

Photometrics

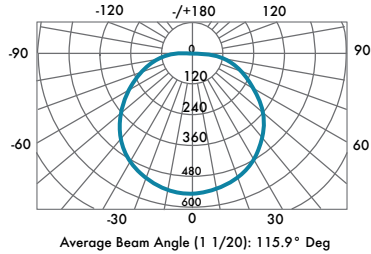

Height	E ave, Emax	Angle: 108.49deg	Diameter
1m	174.9, 550.0lx		277.78cm
2m	43.74, 137.5lx		555.56cm
3m	19.44, 61.11lx		833.35cm
4m	10.93, 34.38lx		1111.13cm
5m	6.998, 22.00lx		1388.91cm

4000k