

Warranty:
 ■ Warranty - Any electrical or mechanical changes made to the product will invalidate the warranty. For further details please see the product datasheet.

- Follow the instructions as illustrated in the diagram.
- The light source of the luminaire is not user replaceable: when the light source reaches the end of its life the luminaire should be replaced.
- The external flexible cable or cord of this luminaire cannot be replaced. If the cord is damaged the luminaire should be destroyed.
- Disconnect the electricity on the circuit which you are working on.
- Terminal block not included. This light must be installed by a qualified electrician only.

INSTALLATION


- FEATURES**
- IP65 LED Highbay
 - 220-240VAC, 50Hz
 - 150W

- FEATURES**
- IP65 LED Highbay
 - 220-240VAC, 50Hz
 - 200W

- FEATURES**
- IP65 LED Highbay
 - 220-240VAC, 50Hz
 - 300W

GEN2-16500 / 16500lm GEN2-22500 / 22500lm GEN2-37500 / 372500lm

- Remove the top allen screws from both sides of the bracket.
- Place the Highbay in the preferred position and fasten the top allen screws on both sides.

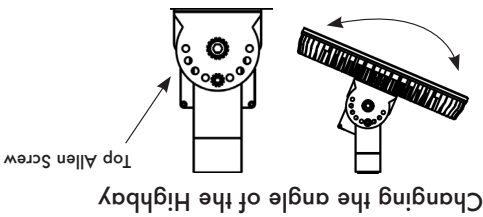

GENESIS2 HIGHBAY LED LIGHT



GENESIS2 LED Highbay

ENERGY LABEL
 энергия · ενεργεια
 | PowerLed II GENESIS2

A++ A+ A B C D E	A++ LED
------------------------------------	--------------------------

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

This luminaire can be switched on & off a minimum of 25,000 times.

150-300 kWh/1000h

Declaration of Conformity

We PowerLed (wholly owned subsidiary of Sunpower Group Holdings Ltd). of Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN, UK. declare under our sole responsibility that our product GENESIS2 is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive (2014/30/EU).

Thursday 30th November 2017.

Mark Ellis
Quality Manager

