

PCC2 Series



9W Constant Current LED Driver



Key Features:


- Constant current mode power supply
- Universal AC input
- IP65 design for indoor or outdoor installation
- Short circuit & over temperature protections
- Pre-wired for convenience
- Cooling by free air convection
- Class II power unit, no FG

PCC2 SPECIFICATION

Part Code	PCC2
Voltage	100V ~ 240VAC
Frequency	50 ~ 60 Hz
Current	0.085A@230Vac
Power Factor	0.5
Voltage	3 ~ 21V
Rated Current	700mA
Power	9W
Efficiency (TYP.)	>68%
Over Load	20% exceed is allowing
Set Up Time	<1s@230VAC at full load
Voltage Tolerance	±0.5 %
Temperature	Operating: -10°C to +40°C Storage: -20°C to +80°C
Safety standard	Designed to meet EN61347-1:2001/EN61347-2-13:2001
EMC Emission	Compliance to EN55015; EN61547
Connections (Input)	200mm H03VV-F 3G*075mm ² 2C
Connections (Output)	200mm H03VV-F 2G*075mm ² 2C
Weight	95g
Dimensions	65 x 35 x 23mm



Mechanical Diagrams

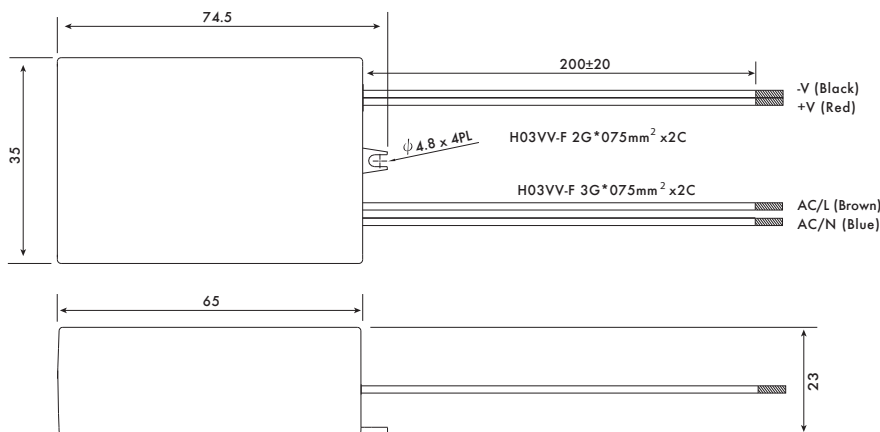

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

