

To comply with warranty requirements the luminaire should be inspected on an annual basis and the inspection recorded. All electrical connections should be checked to ensure that they are clean and tightened correctly. Mechanically the luminaire should be cleaned on all external surfaces including any heat dissipation fins, diffusers, lenses etc."

Any modifications or changes made to the product will invalidate the warranty.

Isolate the incoming AC prior to removing the front cover to access the junction box electrical connections.

internal junction box.

This product is intended to be installed by a qualified electrician, following relevant IEE or national requirements. Failure to wire the product correctly will invalidate the warranty and could present a risk to life'. This product is Class 1 and requires a permanent earth connection with the Line and Neutral to the

trouble free operation.

This is a sensitive electronic product, when installed correctly and handled carefully it will provide years of

Important information about installing your PowerLed luminaire.

"READ THIS FIRST!

## BRIGHTBAY LED Lowbay Installation Instructions



## Declaration of Conformity

We PowerLed (wholly owned subsidiary of Sunpower Group Holdings Ltd). of Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN, UK. declare under our responsibility that our product BRIGHTBAY is here with confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive (2014/30/EU).

Friday 30th October 2020.

Mark Ellis  
Quality Manager



## Brightbay LED Lowbay



**ENERGY LABEL**  
Y IJA  
IE IA  
енергия · ενεργεια  
I PowerLed II BRIGHTBAY

**A++** LED

A++  
A+  
A  
B  
C  
D  
E

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.


This luminaire can be switched on & off a minimum of 25,000 times.

**100-200 kWh/1000h**


# BRIGHTBAY Series

## LED Lowbay Light Instructions


**1** Brighbay can be suspended.

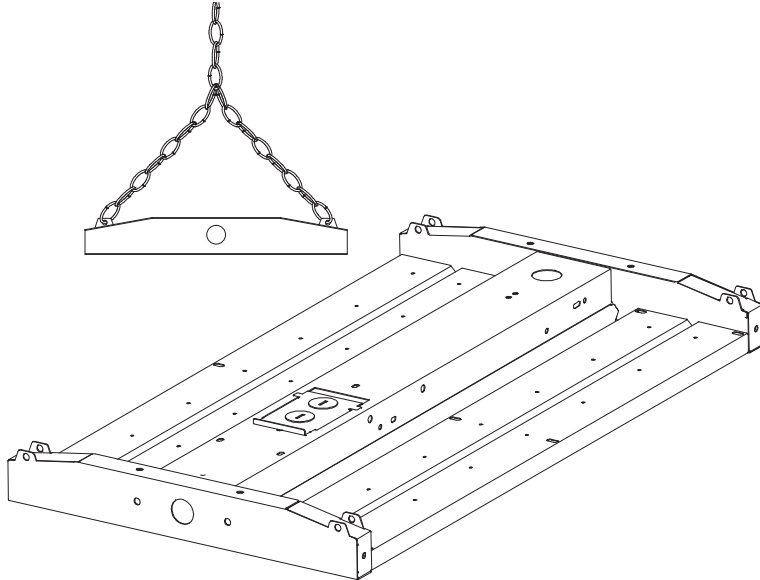

**2** Cable installation

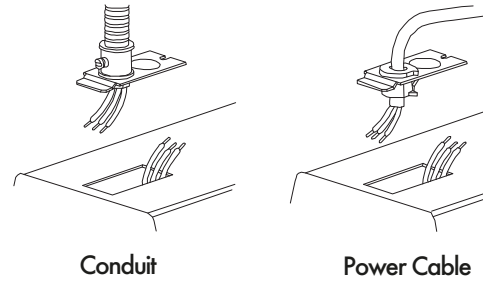

Wiring



Brown - L  
Blue - N  
G/Y - GND