



## Declaration of Conformity

We PowerLed (UK) Ltd (wholly owned subsidiary of Sunpower Group Holdings Ltd). of Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN, UK. declare under our responsibility that our products STREET and PATHFINDER are here with confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive (2014/30/EU).

Wednesday 8th June 2016.

Mark Ellis  
Quality Manager




Registered in England: No. 9436662  
Registered Office: Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN

## STREET & PATHFINDER LED LIGHT



<b>ENERGY</b> Y IJA IE IA	
<b>енергия · ενεργεια</b>	
I PowerLed II STREET&PATHFINDER	
A++ A+ A B C D E	<b>A++</b> <b>LED</b>
This luminaire contains built-in LED lamps.	
The lamps cannot be changed in the luminaire.	
This luminaire can be switched on & off a minimum of 25,000 times.	
<b>30-150 kWh/1000h</b>	

www.powerled.uk.com

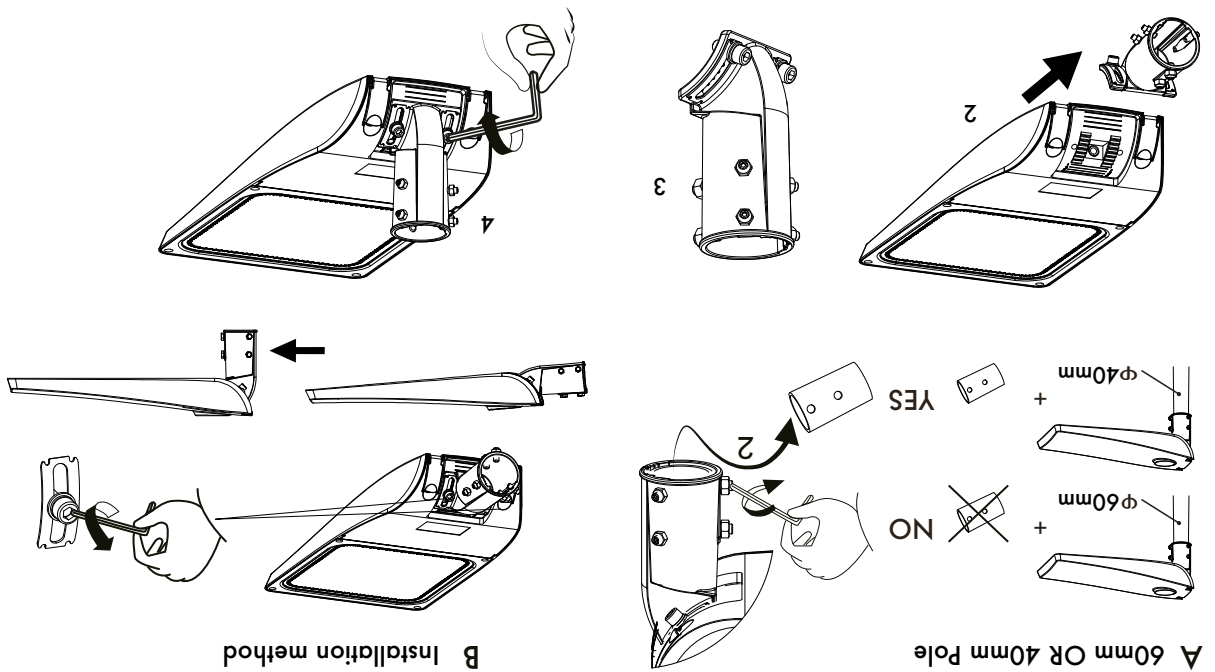


- A 60mm OR 40mm Pole**
- Read through this manual before installation.
  - The product must be installed and maintained by certified electrician.
  - Consult with the manufacturer before maintenance.
  - Turn Off the power before installation and maintenance.
  - Make sure the products are securely installed.
  - The housing might become hot after operation.
  - Make sure the construction is strong enough to support the products.
  - If the temperature is too high, the output power will reduce until the temperature returns to normal.

### INSTALLATION INSTRUCTIONS

# STREET & PATHFINDER LED Light Instructions




## C Mounting to a light pole

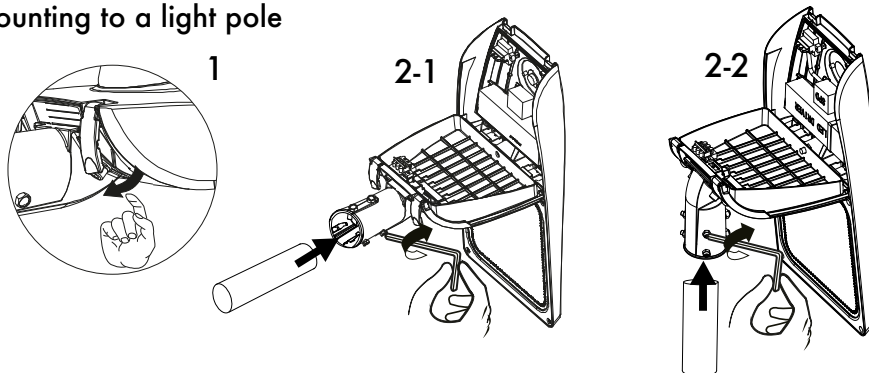


## D Wiring diagram


28W - 65W

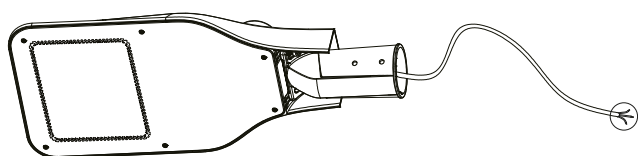


ON-OFF




75W - 180W

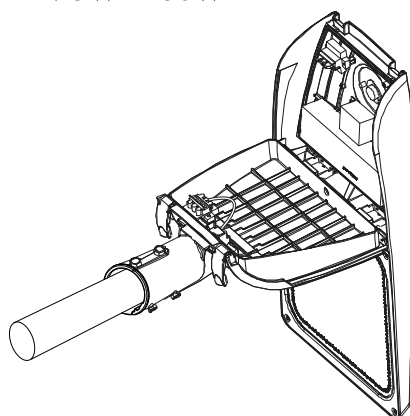

Smart Control

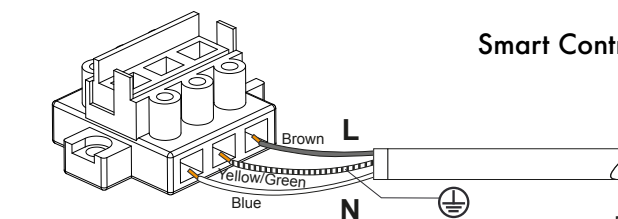

DC — red — AUX  
C+ — grey — SR+  
C- — black — SR-

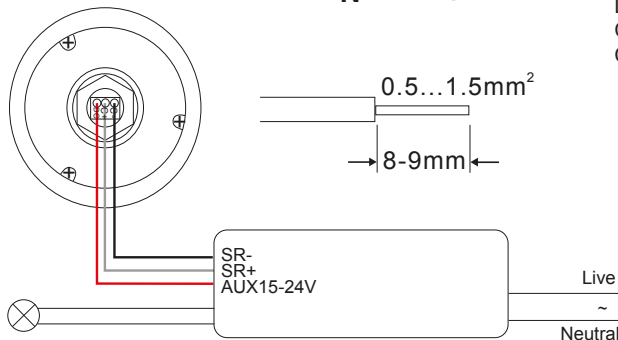

## E Adjustable Angle

Adjustable

