


ZEN-E LOW PROFILE DIMMABLE DOWNLIGHT

The low profile IP44 ZEN-E dimmable downlight is offered in 3 sizes and with a range of lumen outputs from 750~1120lm. Available in white, satin Nickel and black trims.

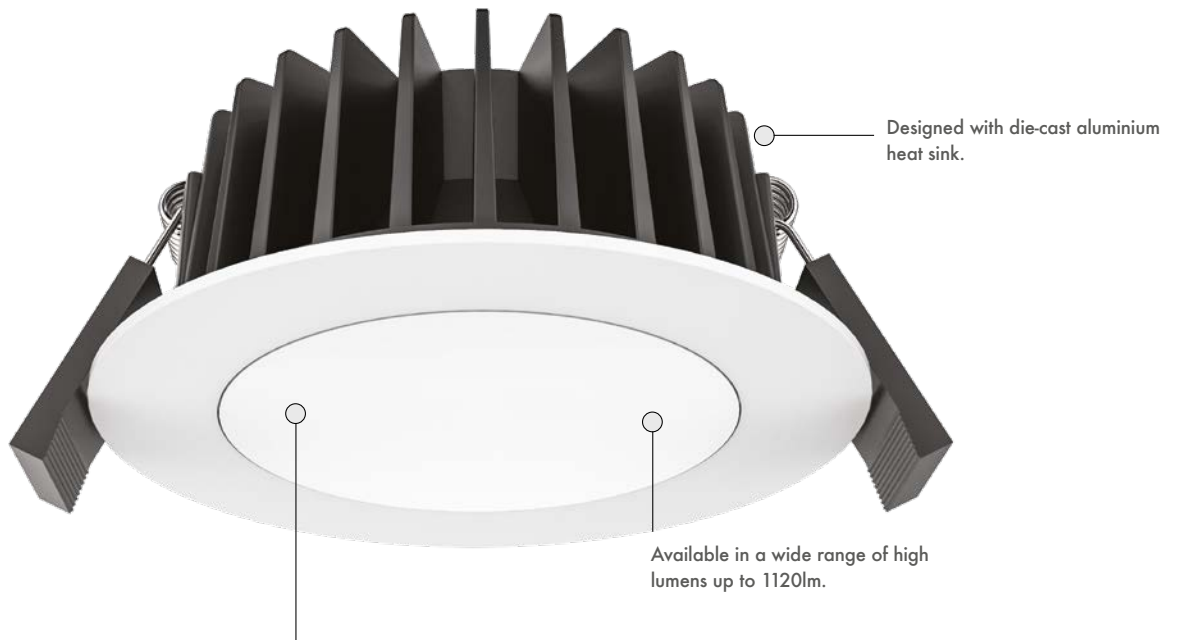

Available in White, Satin Nickel and Black trims.

Optional Variant: DALI compatible.
DALI dimming - digital input signal.



White

Satin Nickel

Black

Product Features

- Lower profile
- Higher lumens
- Less power
- Replacing CFL and halogen downlight applications
- Die-cast aluminium heat sink
- Powder coated finish
- High efficiency LED chip and reflector system
- Dimmable driver, compatible with leading edge and trailing edge dimmer
- Long life, average 50,000 hours
- Available in a wide range of lumen outputs and wattages
- Super low profile version available to fit ceilings with a shallow void above
- Frosted diffuser to reduce glare

ZEN-E10

Power	Input Voltage	Beam Angle	Driver AC Input	CRI	Lumen Output	Fitting Colour	Colour	Part Code
8W	23V	90°	220-240V	82	800lm	White	3000K	ZEN-E10-WH-3000K
					850lm	White	4000K	ZEN-E10-WH-4000K
					850lm	White	6000K	ZEN-E10-WH-6000K
					750lm	Satin Nickel	3000K	ZEN-E10-SN-3000K
					800lm	Satin Nickel	4000K	ZEN-E10-SN-4000K
					800lm	Satin Nickel	6000K	ZEN-E10-SN-6000K
					750lm	Black	3000K	ZEN-E10-BK-3000K
					800lm	Black	4000K	ZEN-E10-BK-4000K
					800lm	Black	6000K	ZEN-E10-BK-6000K



Dimensions Ø 110 x 36mm

Weight 210g



ZEN-E12

Power	Input Voltage	Beam Angle	Driver AC Input	CRI	Lumen Output	Fitting Colour	Colour	Part Code
11W	32V	90°	220-240V	82	1060lm	White	3000K	ZEN-E12-WH-3000K
					1120lm	White	4000K	ZEN-E12-WH-4000K
					1120lm	White	6000K	ZEN-E12-WH-6000K
					1000lm	Satin Nickel	3000K	ZEN-E12-SN-3000K
					1060lm	Satin Nickel	4000K	ZEN-E12-SN-4000K
					1060lm	Satin Nickel	6000K	ZEN-E12-SN-6000K
					1000lm	Black	3000K	ZEN-E12-BK-3000K
					1060lm	Black	4000K	ZEN-E12-BK-4000K
					1060lm	Black	6000K	ZEN-E12-BK-6000K



Dimensions Ø 110 x 36mm

Weight 210g



ZEN-E12.5

Power	Input Voltage	Beam Angle	Driver AC Input	CRI	Lumen Output	Fitting Colour	Colour	Part Code
9W	26V	100°	220-240V	82	750lm	White	3000K	ZEN-E12.5-WH-3000K
					800lm	White	4000K	ZEN-E12.5-WH-4000K
					750lm	Satin Nickel	3000K	ZEN-E12.5-SN-3000K
					800lm	Satin Nickel	4000K	ZEN-E12.5-SN-4000K



Dimensions Ø 98 x 51mm

Weight 185g



ZEN-E13.5

Power	Input Voltage	Beam Angle	Driver AC Input	CRI	Lumen Output	Fitting Colour	Colour	Part Code
11W	32V	100°	220-240V	82	1000lm	White	3000K	ZEN-E13.5-WH-3000K
					1050lm	White	4000K	ZEN-E13.5-WH-4000K
					1000lm	Satin Nickel	3000K	ZEN-E13.5-SN-3000K
					1050lm	Satin Nickel	4000K	ZEN-E13.5-SN-4000K



Dimensions Ø 120 x 51mm

Weight 200g

